

MicroATX Form Factor

Intel® Desktop Board DG41TY Classic Series

The value proposition for mainstream platform

Experience the latest Intel® Desktop Board DG41TY—built to cater to digital home entertainment and home application users. It delivers reliability, affordability, and versatility to meet a variety of digital needs.

Experience enhanced performance exhilaration

- Supports a wide range of the latest Intel® 45nm processors, including the new Intel® Core™2 Quad** and Intel® Core™2 Duo processors.
- Delivers up to 8 GB¹ support for DDR2 800 / 667 SDRAM memory.

New generation of graphics capabilities

- Intel® Graphics Media Accelerator X4500 with Intel® Clear Video Technology.
- Supports DirectX* 10, which enhances your gaming experience.
- Enjoy smoother high-definition video thanks to built-in hardware video decode acceleration (full hardware acceleration decode on MPEG-2 and partial on VC1 and AVC/H.264).
- VGA and DVI-D graphics output with dual display capability.

More flexibility creates more possibilities

The Intel® Desktop Board DG41TY offers legacy and premium features to meet a variety of digital needs.

- Great network connectivity with integrated 10/100/1000 network connection.
- Rich sound quality of the Intel® High Definition Audio with 5.1 surround sound.
- Parallel port, floppy connector, and serial header onboard to meet the bare necessities.
- Microsoft* Windows Vista* Premium WHQL certified.



Intel® Desktop Board DG41TY

Be thrilled by your new digital experience as you benefit from the host of software included with the Intel® Desktop Board DG41TY.



The boxed Intel® Desktop Board DG41TY solution includes:

- ATX 2.2 compliant I/O shield
- SATA and ATA 100/66 Cables
- Board and back panel I/O layout stickers
- Quick reference guide
- Intel® Express Installer driver and software DVD
- Microsoft® Windows Vista® Premium WHQL certified

Software Included:

- Intel® Integrator Assistant (Internet Download)
- Intel® Platform Administration Technology
- Acronis® True Image OEM
- Diskeeper® Home Edition
- DivX® for Windows®
- Laplink® PCmover® Express
- Norton Internet Security®
- Skype®
- TypePad®
- WildTangent®
- Kaspersky® Anti-Virus (Russian)
- Kingsoft® Antivirus (Chinese)
- Kingsoft® Powerword® (Chinese)

Features and Benefits

Intel® Desktop Board DG41 TY

1 Support for the Intel® Core™2 Quad** and Intel® Core™2 Duo processors:

Features quad-core and dual-core processing with 1333 / 1066 / 800 MHz system bus in the LGA775 package.

2 Intel® G41 Express Chipset featuring Intel® Graphics Media Accelerator X4500

3 Dual-Channel DDR2 800 / 667 memory support:

Two DIMM sockets, designed to support up to 8 GB¹ of DDR2 800 / 667 SDRAM memory, delivering greater platform performance and flexible memory support.

4 PCI Express* x16 graphics connector:

Delivers up to 8 GB/s bandwidth.

5 Four Serial ATA ports (3.0 Gb/s):

Facilitates high-speed storage and data transfers at up to 3.0 Gb/s for each of four ports.

6 Integrated 10/100/1000 Network Connection:

Features onboard 10/100/1000 Mb/s Ethernet LAN connectivity.

7 Intel® High Definition Audio with 5.1 surround sound:

Enables high-quality integrated audio that rivals the performance of high-end discrete audio solutions.

8 Two PCI connectors:

Provides expansion slots for custom system configurations and future add-in card upgrades.

9 PCI Express x1 connector:

Designed for bandwidth-intensive applications, PCI Express x1 I/O offers up to 3.5 times the bandwidth over traditional PCI architecture.


10 Eight Hi-Speed USB 2.0 ports:

Provides four back panel ports and an additional four USB ports via two internal headers.

11 Floppy connector

12 Parallel port and VGA + DVI-D graphics ports

13 MicroATX form factor

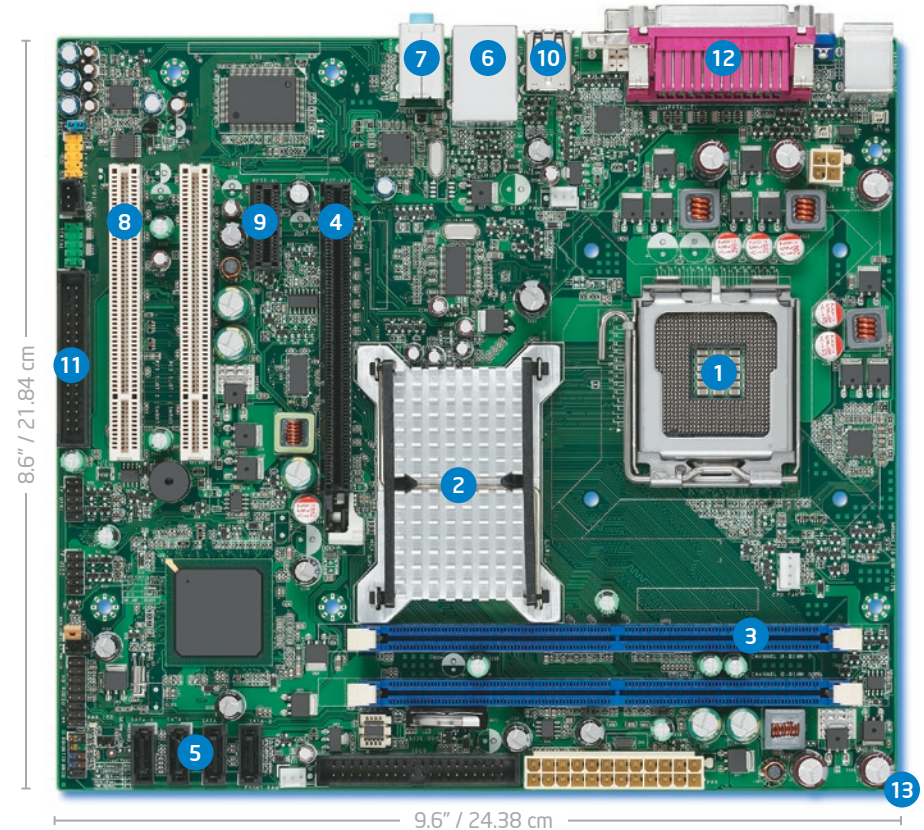

Technical Specifications

Processor

Processor Support

- Intel® Core™2 Quad** processor in the LGA775 package
- Intel® Core™2 Duo processor in the LGA775 package
- Intel® Pentium® Dual-Core processor in the LGA775 package
- Intel® Celeron® Dual-Core processor in the LGA775 package
- Intel® Celeron® processor 400 sequence in the LGA775 package
- Supports Intel® 64 Architecture²

Chipset

Intel® G41 Express Chipset

- Intel® 82G41 Graphics and Memory Controller Hub (GMCH)
- Intel® 82801GB I/O Controller Hub (ICH7)

Graphics Memory Controller Hub (GMCH)

- Designed to support up to 8 GB¹ of system memory using DDR2 800 / 667 SDRAM memory
- Intel® Fast Memory Access
- Intel® Graphics Media Accelerator X4500 with Intel® Clear Video Technology

Intel® I/O Controller Hub (ICH)

- Four SATA (3.0 Gb/s) ports
- Integrated 10/100/1000 network connection
- Eight Hi-Speed USB 2.0 ports (four back panel ports and an additional four USB ports via two internal headers)

System BIOS

- 8 Mb Flash EEPROM with Intel® Platform Innovation Framework for EFI Plug and Play, IDE drive auto-configure
- Advanced configuration and power interface V1.0b, DMI 2.0, multilingual support
- Serial Peripheral Interface (SPI) Flash

Intel® Rapid BIOS Boot

- Optimized POST for faster access to PC from power-on

System Memory

Memory Capacity

- Two 240-pin DIMM connectors supporting up to two double-sided DIMMs

Memory Types

- DDR2 800 / 667 SDRAM memory support
- Non-ECC Memory

Memory Modes

- Dual- or single-channel operation support

Memory Voltage

- 1.8 V

Hardware Management Features

- Processor fan speed control
- System chassis fan speed control
- Voltage and temperature sensing
- Fan sensor inputs used to monitor fan activity
- Power management support for ACPI 1.0b

Expansion Capabilities

- Two PCI bus add-in card connectors
- One PCI Express* x1 bus add-in card connectors
- One PCI Express x16 graphics connector
- Ultra ATA 100 / 66 devices

Jumpers and Front-Panel Connectors

Jumpers

- Single configuration jumper design
- Jumper access for BIOS maintenance mode

Front-Panel Connectors

- Reset, HDD LED, Power LEDs, power on/off
- Two front-panel Hi-Speed USB 2.0 headers
- Front-panel audio header
- One serial header

Mechanical

Board Style

- ATX 2.2-compliant

Board Size

- 9.6" x 8.6" (24.38 cm x 21.84 cm)

Baseboard Power Requirements

- ATX12V

Environment

Operating Temperature

- 0° C to +55° C

Storage Temperature

- 20° C to +70° C

Regulations and Safety Standards

United States and Canada

- CSA/UL 60950-1, First Edition (Binational Standard)

Europe

- (Low Voltage Directive 2006/95/EC) EN 60950-1:2006

International

- IEC 60950-1:2001, First Edition

EMC Regulations

(tested in representative chassis)

United States

- FCC 47 CFR Part 15, Subpart B

Canada

- ICES-003 Class B

Europe

- (EMC Directive 2004/108/EC) EN 55022:2006 and EN 55024:1998

Australia/New Zealand

- EN 55022:2006 Class B

Japan

- VCCI V-3/04.04, V-4/03.04, Class B

South Korea

- KN-22:2005 and KN-24:2005

Taiwan

- CNS 13438:2006 Class B

International

- CISPR 22:2005 +A1:2005 +A2:2006 Class B

Environmental Compliance

Europe

- Europe RoHS (Directive 2002/95/EC)

China

- China RoHS (MII Order # 39)



Lead-Free: The symbol is used to identify electrical and electronic assemblies and components in which the lead (Pb) concentration level in any

of the raw materials and the end product is not greater than 0.1% by weight (1000 ppm). This symbol is also used to indicate conformance to lead-free requirements and definitions adopted under the European Union's Restriction on Hazardous Substances (RoHS) directive, 2002/95/EC.

Ordering Information: See the Intel Web site at www.intel.com. For the most current product information, visit developer.intel.com/design/motherbd/

¹ System resources and hardware (such as PCI and PCI Express*) require physical memory address locations that can reduce available addressable system memory. This could result in a reduction of as much as 1 GB or more of physical addressable memory being available to the operating system and applications, depending on the system configuration and operating system.

² 64-bit computing on Intel® architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers and applications enabled for Intel® 64 architecture. Processors will not operate (including 32-bit operation) without an Intel 64 architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. See <http://developer.intel.com/technology/intel64/index.htm> for more information.

INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH INTEL® PRODUCTS. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN INTEL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, INTEL ASSUMES NO LIABILITY WHATSOEVER, AND INTEL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND/OR USE OF INTEL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT, OR OTHER INTELLECTUAL PROPERTY RIGHT.

Intel products are not intended for use in medical, life-saving, or life-sustaining applications. Intel may make changes to specifications and product descriptions at any time, without notice.

All products, dates, and figures specified are preliminary based on current expectations, and are subject to change without notice. Availability in different channels may vary.

Intel, the Intel logo, Intel Core, Pentium, and Celeron are trademarks of Intel Corporation in the U.S. and other countries.

* Other names and brands may be claimed as the property of others.

** Supports 95 W Thermal Design Power, Intel® Core™2 Quad Processors with 1333 / 1066 MHz System Bus. For information, visit processormatch.intel.com

Copyright © 2008 Intel Corporation. All rights reserved. 0908/TC/MS/PDF

320526-001 US

